



Technical data

product description

- 550H - four legs, plastic seat and backrest
- 550H 2P- four legs, with armrests, plastic seat and backrest
- 550V - cantilever, plastic seat and backrest
- 550V 2P - cantilever, with armrests, plastic seat and backrest
- 555H - four legs, plastic seat, mesh backrest
- 555H 2P - four legs, with armrests, plastic seat, mesh backrest
- 555V - cantilever, plastic seat, mesh backrest
- 555V 2P - cantilever, with armrests, plastic seat, mesh backrest
- 560H - four legs, upholstered seat, plastic backrest
- 560H 2P - four legs, with armrests, upholstered seat, plastic backrest
- 560V - cantilever, upholstered seat, plastic backrest
- 560V 2P - cantilever, with armrests, upholstered seat, plastic backrest
- 570H - four legs, upholstered seat and backrest
- 570H 2P- four legs, with armrests, upholstered seat and backrest
- 570V - cantilever, upholstered seat and backrest
- 570V 2P - cantilever, with armrests, upholstered seat and backrest
- 575H - four legs, upholstered seat, mesh backrest
- 575H 2P - four legs, with armrests, upholstered seat, mesh backrest
- 575V - cantilever, upholstered seat, mesh backrest
- 575V 2P - cantilever, with armrests, upholstered seat, mesh backrest

frame

Metal tube with cross section fi 22 mm.

Variants:

- black (powder coated)
- metallic (powder coated)
- shiny chrome (chrome)
- satin chrome (chrome)

armrest

Hard plastic; always black.

glides - standard - teflon glides (universal),
- option - felt glides (for hard floors).

seat - plastic, black
- upholstered - cut foam - density 35 kg/m3

backrest - plastic
- upholstered - cut foam - density 25 kg/m3
- mesh


net weight 550H, 555H - 5,5 kg
550H 2P, 555H 2P - 6,0 kg
550V, 555V, 570H 2P - 7,5 kg
550V 2P, 555V 2P, 570V - 8,5 kg
560H, 575H - 6,5 kg
560H 2P, 570H, 575H 2P - 7,0 kg
560V, 575V - 8,0 kg
560V 2P, 575V 2P - 9,0 kg
570V 2P - 9,5 kg


gross weight 550H, 555H - 9,5 kg
550H 2P, 555H 2P - 10 kg
550V, 555V - 11,5 kg
550V 2P, 555V 2P - 12,5 kg
560H, 575H - 10,5 kg
560H 2P, 570H, 575H 2P - 11,0 kg
560V, 575V - 12,0 kg
560V 2P, 575V 2P - 13,0 kg
570H 2P - 11,5 kg
570V - 12,5 kg
570V 2P - 13,5 kg

stacking 550H, 550H 2P, 555H, 555H 2P - 5 unités
560H, 560H 2P, 570H, 570H 2P, 550V, 550V 2P, 555V, 555V 2P, 560V, 560V 2P, 570V,
570V 2P - 3 unités


additional Joining in rows

Dimensions

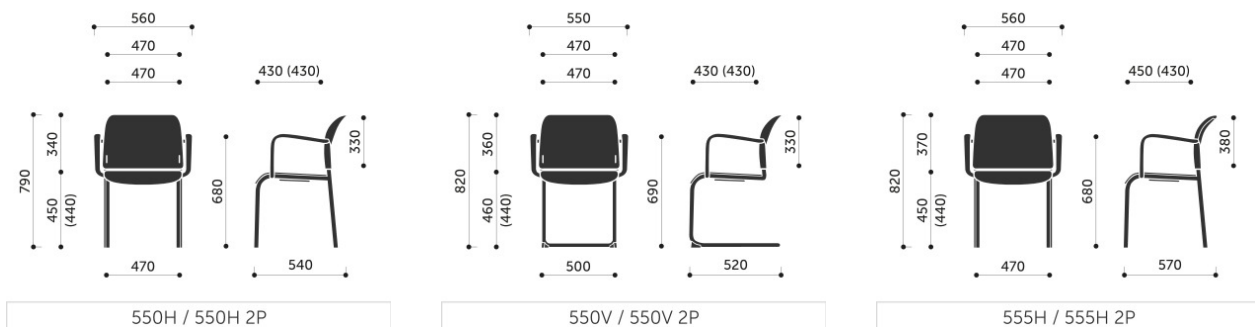


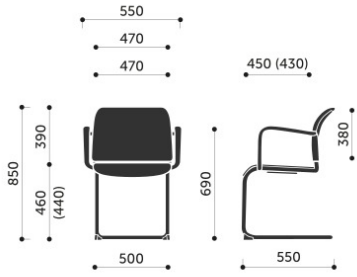


555V / 555V 2P

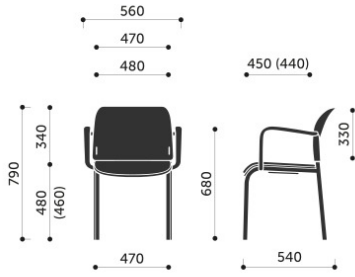


560H / 560H 2P

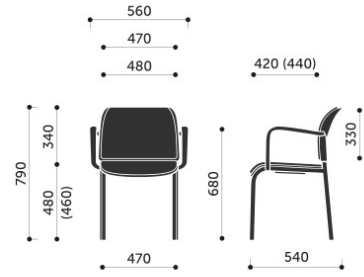


570H / 570H 2P

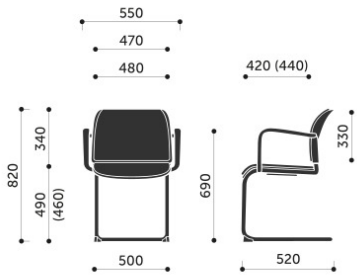


570V / 570V 2P

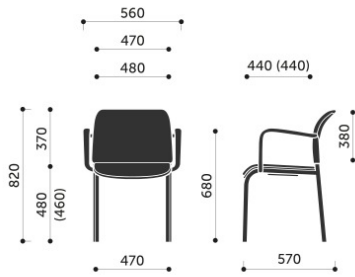


575H / 575H 2P

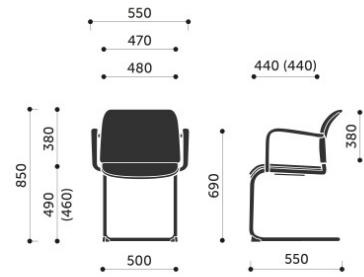

575V / 575V 2P



H



V